


# Instructions For Using Your Mini Table

## 1 Install the Mini Table on your grinder

If you own a Glastar G7, the Mini Table is ready to use. Just plug it into the work surface.

If you own a Glastar "Diamond Star™" or the "Super Star II™", remove the spacer before installing the Mini Table on your grinder.

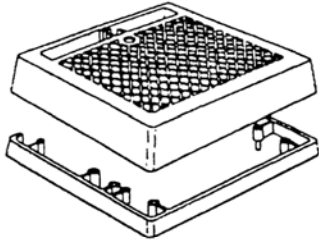

If you own a Glastar G6\*, or G3 or G4 with a G6 work surface, or any Inland grinder, you must make a small modification to the Table.

Turn the Mini Table upside down and locate the 4 legs labeled A on the drawing. Cut these off flush with the bottom surface. Find the two 3/16" (4.7625mm) pegs and push them solidly into the pair of holes that correspond to the grinder you own:

- B-Glastar G6\* or any G3 or G4 with a G6 work surface
- C-Inland pop Top Wiz and Wizling
- D-Inland Wizard and old style Wiz and Wizling

When you plug the Table into the work surface, the two pegs hold down the table firmly in place so it does not move while you are grinding.



## 2 Install the sponge and retainer


Put the sponge in place in the water well. If you have placed it correctly, one edge of the sponge should be resting against the 1/4" (6.35mm) grinding head. Next insert the sponge retainer in its hole and push it down as far as it will go. The star shaped end of the retainer should be buried in the sponge. The retainer is very important. If you don't use it, the sponge will not stay in place when the motor is turned on.

## 3 Fill the well with water

That should allow you 15 or more minutes of grinding before it is necessary to refill the well.

### Contents of the Package:

- one Mini Table
- two 3/16" (4.7625mm) pegs
- two "L" shaped sponges
- two sponge retainers

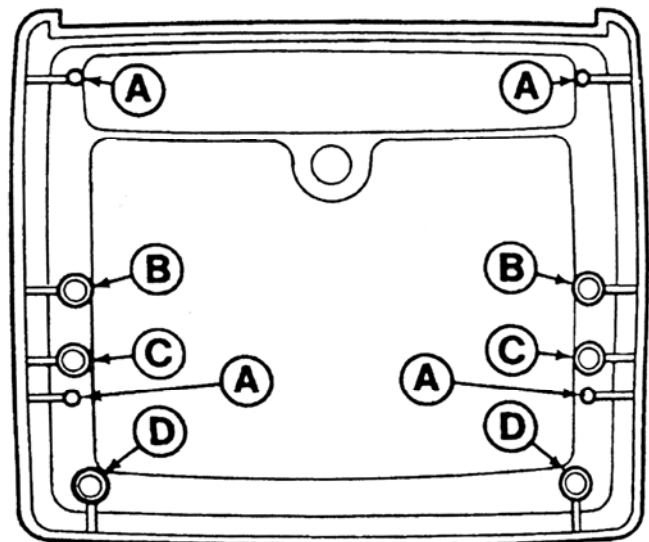

\*To be able to use the Mini Table with the G6, the pump stanchion and the 1/4" (6.35mm) head alignment collar must be removed. A 1/4" (6.35mm) head adapter must be used as an extension for the 1/4" (6.35mm) head or it will not be tall enough.